



# DAS SERIES

High-tech and high quality Karaoke digital amplifier with large LCD panel

This model has a large multi-purpose color LCD panel.

The use of BTL connection enables the amplifier to be used as a high power amplifier.

(BTL Power: 300W x 2ch) (DAS-400)

“Simple mode” function (Sound effect control software) gives family users easy to use.

1. Graphical setup on large LCD.
2. Simple mode for family use.
3. Switch 4ch / 2ch connection. (DAS-400)



10 bands Equalizer




6 types Echo



Simple / Professional mode



How to connect

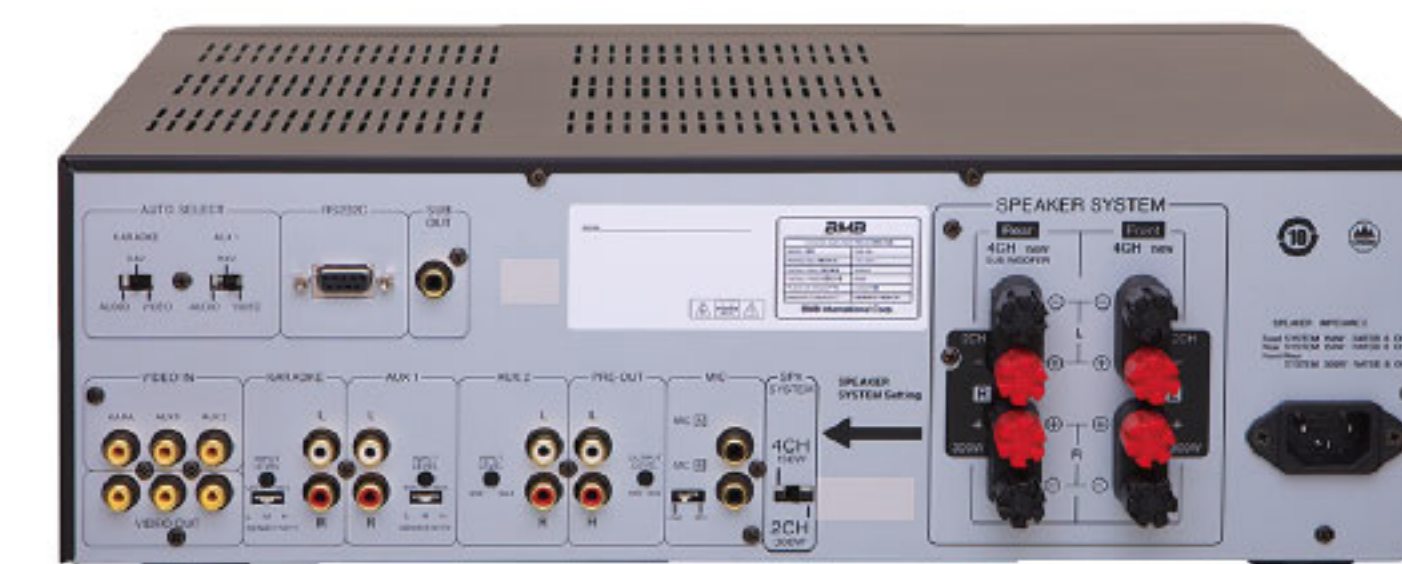

DAS-400 [SE]



DAS-200 [SE]



RMS-300

Max Output Power	300W x 2CH (8Ω, EIAJ) : 2 speakers system 150W x 4CH (8Ω, EIAJ) : 4 speakers system	150W x 2CH (8Ω, EIAJ)
Main Pitch Degree	13degrees ±3.0DSP	13degrees ±3.0DSP
Audio Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Video Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Mic Input	5 systems : front 3, rear 2	5 systems : front 3, rear 2
Echo	Preset 6 Echoes	Preset 6 Echoes
Sound Effect	Preset 6 Sound Effects	Preset 6 Sound Effects
Equalizer	10 bands (Music, Mic)	10 bands (Music, Mic)
LCD Display	480x272 dots TFT Color LCD	480x272 dots TFT Color LCD
AC Input	AC110V ~ 120V (50/60 Hz) : DAS-400 (SE)-100 AC220V ~ 240V (50/60 Hz) : DAS-400 (SE)-200	AC110V ~ 120V (50/60 Hz) : DAS-200 (SE)-100 AC220V ~ 240V (50/60 Hz) : DAS-200 (SE)-200
Dimensions (mm)	420(W) x 135(H) x 335(D)	420(W) x 135(H) x 335(D)
Weight	12.5kg	10.5kg



How to connect (150Wx4CH Mode)



How to connect (300Wx2CH Mode)